

(WO/2001/067786) PACKET CORE FUNCTION AND METHOD OF SELECTING A PACKET DATA SERVICE NODE/FOREIGN AGENT IN A PACKET DATA NETWORK

Biblio. Data	Description	Claims	National Phase	Notices	Documents
--------------	-------------	--------	----------------	---------	-----------

Latest bibliographic data on file with the International Bureau

Publication Number: WO/2001/067786 **International Application No.:** PCT/SE2001/000455
Publication Date: 13.09.2001 **International Filing Date:** 02.03.2001
Chapter 2 Demand Filed: 02.10.2001

Int. Class.: H04L 29/06 (2006.01), H04M 15/00 (2006.01), H04Q 7/38 (2006.01), H04Q 7/22 (2006.01)

Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).


Inventors: MADOUR, Lila; 34 Rue Beaubois Kirkland, Quebec H9J 3W2 (CA).
 SEGURA, Louis; 1800 Guertin St. Laurent, Quebec H4L 4C8 (CA).
 SHAFIK, Karim; 28 Buttonwood Dollard-des-Ormeaux, Quebec H9A 2N2 (CA).

Agent: ERICSSON CANADA, INC.; LMC/UP IPR Section 8400 Decarie Boulevard Town Mount Royal Montreal; Quebec H4P 2N2 (CA).

Priority Data: 60/188,529 10.03.2000 US
 09/658,432 08.09.2000 US

Title: PACKET CORE FUNCTION AND METHOD OF SELECTING A PACKET DATA SERVICE NODE/FOREIGN AGENT IN A PACKET DATA NETWORK

Abstract: A packet Core Function (PCF(53, 75, 88, 89)) and method of consistently selecting a Packet Data Service Node (PDSN(54, 81, 90)) from a plurality of PDSNs in a packet data network to host a data session for a Mobile Node (MN(40)). In a first embodiment, a static lookup table (34) in the PCF (42, 44, 46) is used to associate a list of identifiers for MNs and a list of the plurality of PDSNs in the network. The PCF obtains an identifier for the MN and utilizes the lookup table and a hash function to associate the identifier for the MN with a PDSN. The PDSN is then selected by the PCF to host the data session for the MN. In another embodiment, the PCF also includes a cache timer (49) and a cache memory that stores the identifier for the MN and the IP address of the selected PDSN for a predetermined time period following the handoff of the MN to another PCF. If the MN returns to the PCF within the predetermined period of time, the PCF reselects the same PDSN to host the data session. In another embodiment, following the initial selection of a PDSN to host the data session, the IP address of the PDSN is sent to the MN which then passes the IP address of the PDSN to any subsequent PCFs where the MN roams. A PDSN zone ID may be utilized in lieu of the full IP address.

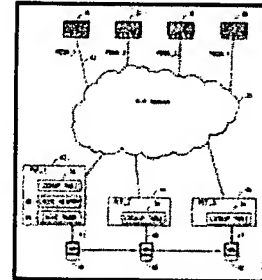

Designated States: AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.

African Regional Intellectual Property Org. (ARIPO) (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW)
 Eurasian Patent Organization (EAPO) (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM)
 European Patent Office (EPO) (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR)
 African Intellectual Property Organization (OAPI) (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

Publication Language: English (EN)
Filing Language: English (EN)

1

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 September 2001 (13.09.2001)

PCT

(10) International Publication Number
WO 01/67786 A2

- (51) International Patent Classification: H04Q 7/00
- (21) International Application Number: PCT/SE01/00455
- (22) International Filing Date: 2 March 2001 (02.03.2001)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/188,529 10 March 2000 (10.03.2000) US
09/658,432 8 September 2000 (08.09.2000) US
- (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).
- (72) Inventors: MADOUR, Lila; 34 Rue Beauvois, Kirkland, Quebec H9J 3W2 (CA). SEGURA, Louis; 1800 Guertin, St. Laurent, Quebec H4L 4C8 (CA). SHAFIK, Karim; 28 Buttonwood, Dollard-des-Ormeaux, Quebec H9A 2N2 (CA).
- (74) Agents: MAGNUSSON, Monica et al.; Ericsson Radio Systems AB, Patent Unit Radio Access, S-164 80 Stockholm (SE).
- (81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.
- (84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW). Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM). European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR). OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).
- Published:
— without international search report and to be republished upon receipt of that report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: PACKET CORE FUNCTION AND METHOD OF SELECTING A PACKET DATA SERVICE NODE/FOREIGN AGENT IN A PACKET DATA NETWORK

(57) Abstract: A packet Core Function (PCF(53, 75, 88, 89)) and method of consistently selecting a Packet Data Service Node (PDSN(54, 81, 90)) from a plurality of PDSNs in a packet data network to host a data session for a Mobile Node (MN(40)). In a first embodiment, a static lookup table (34) in the PCF (42, 44, 46) is used to associate a list of identifiers for MNs and a list of the plurality of PDSNs in the network. The PCF obtains an identifier for the MN and utilizes the lookup table and a hash function to associate the identifier for the MN with a PDSN. The PDSN is then selected by the PCF to host the data session for the MN. In another embodiment, the PCF also includes a cache timer (49) and a cache memory that stores the identifier for the MN and the IP address of the selected PDSN for a predetermined time period following the handoff of the MN to another PCF. If the MN returns to the PCF within the predetermined period of time, the PCF reselects the same PDSN to host the data session. In another embodiment, following the initial selection of a PDSN to host the data session, the IP address of the PDSN is sent to the MN which then passes the IP address of the PDSN to any subsequent PCFs where the MN roams. A PDSN zone ID may be utilized in lieu of the full IP address.

WO 01/67786 A2

-1-

**PACKET CORE FUNCTION AND
METHOD OF SELECTING A PACKET DATA SERVICE
NODE/FOREIGN AGENT IN A PACKET DATA NETWORK**

PRIORITY STATEMENT UNDER 35 U.S.C. § 119(e) & 37 C.F.R. § 1.78

This nonprovisional application claims priority based upon the prior U.S. provisional patent application entitled, "Method for Selecting a Packet Data Service Node/Foreign Agent in a Wireless Access", application number 60/188,529, filed March 10, 2000, in the names of Lila Madour, Louis Segura, Karim Shafik, John Barna, and Jean-Charles Gonthier.

BACKGROUND OF THE INVENTION

Technical Field of the Invention

This invention relates to radio telecommunication systems and, more particularly, to a Packet Core Function (PCF) and method of selecting a Packet Data Service Node (PDSN)/Foreign Agent (FA) in a packet data network.

Description of Related Art

Code Division Multiple Access (CDMA) 2000 is the third generation system for CDMA networks. It offers packet-switched call routing via Packet Data Service Nodes (PDSNs) which are used as access concentrators and, in the case of Mobile IP, as Foreign Agents (FAs) for roaming mobile subscribers.

FIG. 1 is a simplified block diagram of an existing packet data network providing radio access to a plurality of mobile subscribers utilizing Mobile Nodes (MNs) 11-13. In packet data networks such as CDMA 2000, MNs gain access to the packet core network through Radio Networks (RNs) 14 and 15 over an air interface link 16. An illustration of the protocols utilized, and where each protocol ends, is shown below the block diagram. An Internet Protocol (IP) network 17 links the RNs to a plurality of PDSNs 18-20 using a Radio-Packet (R-P) interface 21. Each RN may include a plurality of Base Stations (BSs) and Base Station Controllers (BSCs) (not shown). Packet Core Functions (PCFs) 22 and 23 handle the switching of data packets that come from the MNs, and may be located in the BSCs. The PCF selects one PDSN

-2-

to terminate all of its packet data sessions. When a mobile subscriber desires to initiate a packet data session, the PCF selects a PDSN, and a Point-to-Point Protocol (PPP) connection 24 is established between the subscriber's MN and the selected PDSN. Each time a PPP link is established, negotiation takes place with regards to authentication, compression, etc., followed by Agent advertisement and a Mobile IP registration request.

The PDSNs, in turn, utilize one or more sub-networks 25 and 26, and routers 27 and 28 to access the packet-switched network backbone 29. At that point, the MN is connected to the IP network 17, and the IP protocol 30 may be utilized to access the Internet.

The CDMA 2000 standard describes two possible subscription types for mobile subscribers: "Simple IP" and "Mobile IP". In Simple IP, seamless mobility between different PDSNs is not feasible. For a particular data session, the IP address for a mobile subscriber's MN is provided by the PDSN handling that particular session. Therefore, the MN cannot be handed over to another PDSN while continuing a data session because the new PDSN would assign a new IP address to the MN. If the MN receives packets with a new IP address, it automatically concludes that the first session has ended. Therefore, if an MN roams from one PDSN to another in Simple IP, the entire session must be re-negotiated from the beginning. This may involve allocation of traffic channels which should be avoided in the event of dormancy, as well as an entire series of protocols in order to reestablish the session. This process could be long enough to be a visible problem to the user.

In Mobile IP, on the other hand, each MN is pre-allocated an IP address that it always uses regardless of the serving PDSN. A Mobile IP protocol layer on top of the IP layer permits a home agent and a foreign agent to tunnel data towards roaming Mobile IP subscribers. Therefore, during a handover, the new PDSN uses the same pre-allocated IP address as was being used by the old PDSN. However, if the MN keeps switching from one PDSN to another, additional allocations of traffic channels are required, which is an inefficient usage of the air interface.

Mobile IP service is currently described in the CDMA 2000 packet data standard IS-835. The existing standard, however, does not effectively describe any

-3-

methodology by which an MN may consistently select the same PDSN from a packet data network in order to set up its communication links. The standard makes the assumption that when the PCF is selecting a PDSN, the PCF will be able to select the PDSN with which it has a previous PPP connection. However, with the current

5 PDSN-selection procedures, the selection of the same PDSN is not always assured. This issue is important for both Mobile IP users (provided the PPP and the Mobile IP bindings are still active) and Simple IP users, but is particularly critical for Simple IP users where it is even more critical to maintain the connectivity with the same PDSN.

Thus, it would be advantageous for an MN to be able to consistently select the

10 same PDSN for access to the packet data network because this would enable the PPP session between the MN and the PDSN to be preserved. Other proposed solutions to this problem involve methodologies that are performed within the packet core network. These proposals have a centralized view of the network, and require additional network nodes and additional network signaling in order to communicate

15 with or update the configuration of the PDSN and all the current connections that are being set up. It would be preferable to have a solution that is performed in the radio network and does not involve additional nodes or signaling in the core network.

Dormant handoffs are also a problem under the existing standards. In CDMA 2000, the MN goes dormant when no data is transferred over the link for a certain

20 period of time. During the dormant stage, there is no traffic channel assigned to the mobile station; however, the PPP session is maintained. When the dormant MN moves from one packet cell to another, the MN notifies the access network, and the PCF within the access network attempts to select a PDSN for the MN. It would be desirable to select the same PDSN where the PPP and RP connections are still

25 maintained for the Mobile IP user. Otherwise, the network may unnecessarily maintain multiple "hanging PPP connections" in more than one PDSN until the original PPP connections time out and are released. Since PPP resources are expensive to the operator, this is an expensive waste of network resources.

In order to overcome the disadvantage of existing solutions, it would be

30 advantageous to have a method that enables a PCF to consistently select the same PDSN. The method should preferably be a simple selection process that is performed

-4-

primarily in the radio network, and that does not require the introduction of new nodes or new signaling in the core network to handle the functionality. The present invention provides such a method.

5 SUMMARY OF THE INVENTION

In one aspect, the present invention is a method of consistently selecting a particular PDSN from a plurality of PDSNs in a packet data network to host a data session for an MN. The method begins by storing a static lookup table in a PCF, the table including a list of identifiers for MNs and an associated list of the plurality of
10 PDSNs in the network. The PCF then obtains an identifier for the MN and utilizes the lookup table to associate the identifier for the MN with a PDSN. The PDSN is then selected by the PCF to host the data session for the MN. The lookup table is preferably stored in every PCF in the network so that the same PDSN is consistently selected for the MN as it roams in different PCFs.

15 In another aspect, the present invention is a method of reselecting a particular PDSN from a plurality of PDSNs in a packet data network to host a data session for an MN following a handoff of the MN from a source PCF to a target PCF when the MN returns to the source PCF. The source PCF initially assigned the PDSN to host the data session before handing off the MN. The method includes the steps of storing
20 in a cache memory in the source PCF, an identifier for the MN and an IP address for the particular PDSN for a predetermined period of time after handing off the MN. If the MN returns to the source PCF within the predetermined period of time, the PCF reselects the particular PDSN to host the data session.

In yet another aspect, the present invention is a method of consistently
25 selecting a particular PDSN from a plurality of PDSNs in a packet data network to host a data session for an MN. When a PDSN is initially selected to host the data session, the IP address of the PDSN is sent to the MN where it is stored. Thereafter, when the MN roams to another PCF, the MN passes the IP address of the PDSN to the new PCF using, for example, CDMA 2000 air interface layer 3 signaling.

30 In another aspect, the present invention is a PCF that consistently selects a particular PDSN from a plurality of PDSNs in a packet data network to host a data

-5-

session for an MN. The PCF includes a static lookup table that includes a list of identifiers for MNs and an associated list of the plurality of PDSNs in the network. The PCF also includes means for obtaining an identifier for the MN, and a hash function that associates the identifier for the MN with the particular PDSN utilizing the lookup table, and selects the particular PDSN to host the data session for the MN.

5 The PCF may also include a cache memory that stores the identifier for the MN and an IP address for the particular PDSN for a predetermined period of time after handing off the MN to another PCF. A cache timer determines whether the predetermined time period has expired, and the PCF reselects the particular PDSN to host the data session

10 if the MN returns to the PCF within the predetermined period of time.

In yet another aspect, the present invention is a system for consistently selecting a particular PDSN from a plurality of PDSNs in a packet data network to host a data session for an MN. The system includes a Radio-Packet (R-P) network that connects each of a plurality of PCFs to the plurality of PDSNs. Each PCF selects a

15 PDSN to host the data session when the MN roams into an area controlled by the PCF. Each of the PCFs includes a lookup table for associating MNs with PDSNs in the network, means for obtaining an identifier for the MN, and a hash function that associates the identifier for the MN with the particular PDSN utilizing the lookup table, and selects the particular PDSN to host the data session for the MN.

20

BRIEF DESCRIPTION OF THE DRAWINGS

The invention will be better understood and its numerous objects and advantages will become more apparent to those skilled in the art by reference to the following drawings, in conjunction with the accompanying specification, in which:

25 FIG. 1 (Prior Art) is a simplified block diagram of an existing packet data network providing radio access to a plurality of mobile nodes;

FIG. 2 is a simplified block diagram of an R-P network illustrating a PDSN-selection scenario in which a simple hash function is utilized for PDSN selection according to the teachings of the present invention;

30 FIG. 3 is a message flow diagram illustrating the flow of messages when a PDSN IP address is provided to an MN at R-P establishment in accordance with the

teachings of the present invention;

FIG. 4 is an illustrative drawing of a packet zone hierarchy that may be utilized to transfer the PDSN IP address to the MN in an alternative embodiment of the present invention; and

5 FIG. 5 is a message flow diagram illustrating the flow of messages when a PDSN IP address is provided by the MN following a dormant inter-PCF handoff in accordance with the teachings of the present invention.

DETAILED DESCRIPTION OF EMBODIMENTS

10 The method of the present invention is a simple selection process that is performed primarily in the radio network, and does not require the introduction of new nodes or new signaling in the core network to handle the functionality. In the selection process, the PCF reselects a PDSN with which it already has an R-P connection if it is hosting a binding that has not expired.

15 Three embodiments of the present invention are described herein. In a first embodiment, the PCF serving the MN utilizes a simple hash function to initially select a PDSN and to re-select the same PDSN following a dormant handoff to another PCF. A second embodiment also utilizes the hash function for initial PDSN selection, but provides an alternative method of re-selecting the PDSN, following an inter-PCF/intra-PDSN handoff. After initial PDSN selection and the handoff, a cache memory in the original PCF retains the IP address of the PDSN as well as the Mobile Station Identification (MSID) of the MN for a predetermined time period following timeout of the PPP session (i.e., following expiration of the R-P timer). If the MN returns to the original PCF prior to the expiration of the predetermined time period, the PCF uses
20 the MSID and the PDSN IP address to reconnect the MN to the PDSN originally hosting the PPP session. A third embodiment provides an additional alternative method of re-selecting the PDSN, following an inter-PCF/intra-PDSN handoff. In this embodiment, the original PCF supplies the MN with the IP address of the PDSN that has been selected to host the PPP session. Following any hard handoff or dormant
25 handoff, the MN supplies the current serving PCF with the IP address of the PDSN
30 hosting the PPP session.

-7-

Simple Hash Function

The present invention utilizes a simple hash function for initial selection of a PDSN. A static lookup table 34 is stored in all PCFs within the operator's domain. The table maintains an ordered list of the PDSNs, the length of which is the number of PDSNs present in an operator's network. Through a simple manipulation of a key field, the MN's International Mobile Station Identifier (IMSI), the hash function utilizes the lookup table to select one of the PDSNs to handle the session. Using a "modulo" function on the MN's IMSI leads to an index that is used to look up the PDSN that should be selected.

The same algorithm is applied consistently by all the PCFs in the radio network; therefore, all of the PCFs should consistently select the same PDSN for a given MN. Thus, as the MN moves across the network and has contact with new BSCs that communicate with new PCFs, the same PDSN is selected. Assuming an even distribution of MN identities, the PPP sessions, and thus the network load, are distributed evenly across the available set of PDSNs in the R-P network.

Table 1 below illustrates an exemplary lookup table 34 utilized by the simple hash function. The IP address of each PDSN is associated with a number equal to the PDSN number minus one (1).

(IMSI) Modulo (Number of PDSN)	PDSN ref
0	PDSN_1 address
1	PDSN_2 address
...	...
Number of PDSN-1	PDSN_n address

Table 1

Use of the hash function assumes that when a PDSN is selected, that PDSN is available for selection. A problem could arise if the PDSN indicated by the lookup table is not available. For example, the PDSN may be temporarily congested. In this case, an alternate PDSN may be selected for the MN. However, if the network is properly dimensioned to allow for peak loads, the PDSN that is selected should be available and able to provide the service that it is expected to provide.

The present invention assumes that each PCF services one or more BSC's. Each BSC, conversely, can be serviced by one and only one PCF. An additional

assumption is that within one carrier's domain, all PCFs and all PDSNs are interconnected via a single R-P network, or a network of R-P networks, that allows any PCF to connect to any PDSN. There are no signaling interface changes imposed by the PDSN selection hash table and algorithm. The above hash table algorithm
5 should be distributed throughout the PCFs in a carrier's domain for maximum benefit.

The solution utilizing only the simple hash function does not attempt to preserve the PPP session during an intersystem dormant handoff across carrier boundaries. The PPP session in the old serving system is not preserved, and eventually times out. It is assumed that the operator in the target system will deploy
10 a selection scheme that will select a PDSN within the target operator's own domain.

Example Utilizing Simple Hash Function

FIG. 2 is a simplified block diagram of an R-P network 35 illustrating a PDSN-selection scenario in which a simple hash function is utilized for PDSN selection from a plurality of PDSNs 36-39 distributed throughout a network. First, an MN 40 sends
15 an origination message 41 to PCF_1 (42). Based on the MN's IMSI, PCF_1 determines, using the hash function, an index into the static lookup table 34 of PDSNs. Connection to PDSN_1 (36) is determined, and an R-P link 43 is established with PDSN_1 followed by PPP connection establishment and Mobile IP registration.

Next, the MN 40 roams into the coverage of PCF_2 (44) (this can be a hard
20 handoff or a dormant handoff). If it is a hard handoff, the handoff request 45 contains the IP address of the serving PDSN_1 (PPP connection). If it is a dormant handoff, PCF_2 uses the lookup table 34 where the IMSI of the MN points to the PDSN presently hosting the PPP connection (PDSN_1). The PPP connection is thus kept alive, and PCF_2 only negotiates the establishment of a new R-P link to PDSN_1.

25 Next, the MN roams into the coverage of PCF_3 (46) (this can be a hard handoff or a dormant handoff). If it is a hard handoff, the handoff request 47 contains the address of the serving PDSN_1 (PPP connection). If it is a dormant handoff, PCF_3 uses the lookup table 34 where the IMSI of the MN points to the PDSN presently hosting the PPP connection (PDSN_1). The PPP connection is thus kept
30 alive, and PCF_3 only negotiates the establishment of a new R-P link to PDSN_1.

The MN may also roam into the coverage of another PCF (not shown) in

-9-

another operator's network (this can be a hard handoff or a dormant handoff). If it is a hard handoff, the handoff request contains the address of the serving PDSN_1 (PPP connection). If it is a dormant handoff, the PPP session in the old serving system is not preserved, and eventually times out. The simple hash function does not attempt to preserve the PPP session during an intersystem dormant handoff across carrier boundaries. Instead, the operator in the target system deploys a selection scheme that selects a PDSN within the target operator's own domain.

Simple Hash Function With Cache Information

A second embodiment provides an alternative method of re-selecting the PDSN, following an inter-PCF/intra-PDSN handoff. This embodiment helps to ensure that during the lifetime of a PPP session, the same PDSN is selected when the user returns to a previously visited PCF following handoffs. After initial PDSN selection with the hash function, and the inter-PCF/intra-PDSN handoff, a cache memory 48 in the original PCF serving the MN retains the IP address of the PDSN as well as the Mobile Station Identification (MSID) of the MN for the duration of a cache timer 49. The cache timer is set to a value at least equal to the R-P timer so that the information is retained for an additional period of time following timeout of the PPP session (i.e., following expiration of the R-P timer). If the MN returns to the original PCF prior to the expiration of the cache timer 49, the PCF determines which PDSN to select from the stored MSID and PDSN IP address. The PCF then reconnects the MN to the PDSN originally hosting the PPP session. If the cache timer expires before the MN returns to the original PCF, all cached information is eliminated. The setting of the cache timer may be manually configured in the PCF, or may be provided by the PDSN on the A11 interface. The MSID and PDSN IP address are already available in the PCF.

This embodiment offers the benefit of consistently selecting the same PDSN even under the abnormal network condition in which an alternate PDSN was originally selected for the MN by the hash function because of temporary congestion in the preferred PDSN. When a dormant handoff has been performed, and the MN returns to the PCF before the cache timer 49 has expired, the alternate PDSN is again selected, even if the congestion in the preferred PDSN has cleared. This process preserves the

-10-

existing PPP session, while the hash function alone would revert to the preferred PDSN.

PDSN IP Address at Originating Access

5 A third embodiment provides an additional alternative method of re-selecting the PDSN, following an inter-PCF/intra-PDSN handoff. In this embodiment, the original PCF sends an Information Message to the MN with the IP address of the PDSN that has been selected to host the PPP session using, for example, CDMA 2000 layer 3 signaling. Following any dormant handoff (origination request), the MN supplies the new serving PCF with the IP address of the PDSN hosting the PPP session.

10 FIG. 3 is a message flow diagram illustrating the flow of messages when a PDSN IP address is provided to an MN 40 at R-P establishment in accordance with the teachings of the present invention. The messages are sent between the MN 40, a Base Station Controller (BSC) 51, a Mobile Switching Center (MSC) 52, a PCF 53, and a PDSN 54. At 55, the MN sends an origination message to the BSC which returns a BS Acknowledgment Order 56. The BSC then sends a Connection Management (CM) Service Request 57 to the MSC which returns an Assignment Request 58 within time T303. An IS-2000 Traffic Channel (TCH) Establishment procedure 59 is then conducted between the MN and the BSC.

20 If the MN 40 already has a PPP session in progress, and the MN did not report its PDSN IP address in the Origination message, the BSC sends the MN a message to retrieve the IP address of the assigned PDSN at 61. At 62, the MN sends the IP address of the PDSN hosting its PPP session. In the illustrated scenario, it is assumed that the MN does not have a PPP session in progress, or the PDSN IP address provided by the MN is not routable/reachable from the new PCF for some reason. In this case, the BSC sends an A9-Setup-A8 message 63 to the PCF 53, and the PCF selects a PDSN at 64 to host the PPP session. The PCF may utilize the hash table and the IMSI of the MN to select the PDSN. However, if the MN does have a PPP session in progress, the A9-Setup-A8 message is augmented to carry the PDSN IP address to the PCF. In either event, once the PDSN is identified, the PCF has the necessary information to initiate communication (A10/A11 Connection Establishment 65) with

-11-

the same PDSN, thereby preserving the PPP session for the MN.

At 66, the PCF then sends an A9-Connect-A8 message to the BSC 51, including the PDSN IP address. The BSC then sends an Assignment Complete message 67 to the MSC 52. The BSC also sends a CDMA 2000 Information message 5 68 to the MN 40, including the PDSN IP address. The Information message should preferably be sent as a layer 3 CDMA 2000 message rather than as an application message, a Mobile IP message, or a PPP message. The establishment of the PPP connection, and the Mobile IP registration are then completed at 69, and at 70, the transmission of packet data begins between the MN and the PDSN.

10 FIG. 4 is an illustrative drawing of a packet zone hierarchy that may be utilized to transfer the PDSN IP address to the MN in an alternative embodiment of the present invention. An IP address comprises 32 bits, and it may be desirable to transmit fewer bits over the air interface to the MN. In the hierarchy, PCF1 75, PCF2 76, and PCF3 77 each have an associated PCF zone ID (PZID1 78, PZID2 79, and PZID3 80, 15 respectively). In addition, the PDSN 81 has an associated PDSN zone ID 82 that encompasses the PCF zones. Since every radio network entity has its own zone ID, then a table can be built associating IP addresses and zone IDs. Then, only the zone ID has to be transmitted over the air interface. While this embodiment has the disadvantage of having to set up tables, it does reduce the number of bits that have to be transmitted over the air interface. 20

FIG. 5 is a message flow diagram illustrating the flow of messages when a PDSN IP address is provided by the MN following a dormant inter-PCF handoff in accordance with the teachings of the present invention. The messages are sent between the MN 40, a Source BSC 85, a Target BSC 86, a Mobile Switching Center/Visitor Location Register (MSC/VLR) 87, a Source PCF 88, a Target PCF 89, 25 and a PDSN 90. At 91, it is noted that the dormant PPP connection is maintained.

At 92, the MN 40 sends an Origination message to the Target BSC 86, including the PDSN IP address that it was provided when a PDSN was first assigned by the MN's original serving PCF. The Target BSC returns a BS Acknowledgment Order 93. The Target BSC then sends a CM Service Request 94 to the MSC/VLR 87 30 which returns an Assignment Request 95 within time T303. Since the MN 40 already

-12-

has a PPP connection, the Target BSC sends an A9-Setup-A8 message to the Target PCF 89, including the PDSN IP address. The Target PCF then has the necessary information to establish an A10/A11 link 97 with the PDSN 90, thereby preserving the PPP session for the MN. If the Target PCF is unable to receive the PDSN IP address, it may use the hash function to reselect the PDSN or select another PDSN. At 98, the link is switched between the Source PCF 88 and the PDSN.

At 99, the Target PCF 89 then sends an A9-Connect-A8 message to the Target BSC 86. The Target BSC assigns a channel to the MN at 100, and sends an Assignment Complete message 101 to the MSC/VLR 87. If the Target PCF was unable to receive the old PDSN IP address, and a new PDSN was selected, the Target BSC also sends a CDMA 2000 Information message 102 to the MN 40, including the new PDSN IP address. At 103, the transmission of packet data begins between the MN and the PDSN.

In summary, each of the embodiments of the present invention offer a different level of benefits. The simple hash function guarantees PPP session preservation under normal network conditions within a single operator's domain. However, the hash function fails to address the situation in which the MN roams beyond the coverage area of the operator's domain. For example, if the MN roams into the coverage area of another carrier, the PPP session will not be preserved since the PDSN selection will be based on the new operator's hash function as well as its own configuration table. The result will be the selection of a PDSN within the new operator's network, which could be desirable in this case.

Utilizing a cache memory with the MN's MSID and the PDSN's IP address provides an extra benefit when the MN performs an inter-carrier handoff. Following a hard handoff, the cache guarantees the selection of the same PDSN if the MN returns to the original PCF since the PDSN IP address is transferred via signaling. If the MN goes dormant and travels back and forth between the original PCF and another PCF, the cache information guarantees the selection of the same PDSN as long as the cache timer has not expired.

The solution in which the PDSN IP address or the PDSN zone ID is sent to the MN following the R-P connection establishment enables the MN to pass the PDSN IP

-13-

address in the Origination message following dormant handoff. This provides a simple and complete solution for all scenarios.

It is thus believed that the operation and construction of the present invention will be apparent from the foregoing description. While the method shown and
5 described has been characterized as being preferred, it will be readily apparent that various changes and modifications could be made therein without departing from the scope of the invention as defined in the following claims.

WHAT IS CLAIMED IS:

1. A method of consistently selecting a particular Packet Data Service Node (PDSN) from a plurality of PDSNs in a packet data network to host a data session for a Mobile Node (MN), said method comprising the steps of:
 - storing a static lookup table in a Packet Core Function (PCF), said table including a list of identifiers for MNs and an associated list of the plurality of PDSNs in the network;
 - utilizing the lookup table by the PCF to associate the identifier for the MN with a PDSN; and
 - selecting the associated PDSN by the PCF to host the data session for the MN.
2. The method of consistently selecting a particular PDSN of claim 1 wherein the network includes a plurality of PCFs, and the step of storing a static lookup table in a PCF includes storing the lookup table in every PCF in the network.
3. The method of consistently selecting a particular PDSN of claim 2 further comprising the steps of:
 - performing a dormant handoff procedure to hand off the MN from a source PCF to a target PCF in the network, said dormant handoff procedure including the step of passing the identifier for the MN to the target PCF;
 - utilizing the lookup table in the target PCF to associate the identifier for the MN with the selected PDSN; and
 - connecting the MN to the selected PDSN by the target PCF.
4. A method of reselecting a particular Packet Data Service Node (PDSN) from a plurality of PDSNs in a packet data network to host a data session for a Mobile Node (MN) following a handoff of the MN from a source Packet Core Function (PCF) to a target PCF when the MN returns to the source PCF, said source PCF having initially assigned the PDSN to host the data session before handing off the MN, said method comprising the steps of:

-15-

storing in a cache memory in the source PCF, an identifier for the MN and an Internet Protocol (IP) address for the particular PDSN for a predetermined period of time after handing off the MN;

determining whether the MN returned to the source PCF within the predetermined period of time; and

reselecting the particular PDSN to host the data session if the MN returned to the source PCF within the predetermined period of time.

5 5. The method of reselecting a particular PDSN of claim 4 further comprising, before the step of storing in the cache memory the identifier for the MN and the IP address of the particular PDSN, the steps of:

10 storing a static lookup table in all of the PCFs in the network, said table including a list of identifiers for MNs and an associated list of the plurality of PDSNs in the network;

15 obtaining by the source PCF, the identifier for the MN;

utilizing the lookup table in the source PCF to associate the identifier for the MN with the particular PDSN; and

selecting the particular PDSN by the PCF to host the data session for the MN.

20 6. A method of consistently selecting a particular Packet Data Service Node (PDSN) from a plurality of PDSNs in a packet data network to host a data session for a Mobile Node (MN), said particular PDSN being selected by a plurality of Packet Core Functions (PCFs) in the network, said method comprising the steps of:

initially selecting, by a first PCF, the particular PDSN to host the data session;

25 sending an information message from the first PCF to the MN via a Base Station Controller (BSC) with an indication of the Internet Protocol (IP) address of the particular PDSN; and

passing the IP address of the particular PDSN from the MN to any other PCF where the MN roams in the network.

30

7. The method of consistently selecting a particular PDSN of claim 6

-16-

wherein the step of initially selecting the particular PDSN to host the data session includes the steps of:

storing a static lookup table in the first PCF, said table including a list of identifiers for MNs and an associated list of the plurality of PDSNs in the network;

5 obtaining by the first PCF, an identifier for the MN;

utilizing the lookup table by the first PCF to associate the identifier for the MN with a PDSN; and

selecting the associated PDSN by the first PCF to host the data session for the MN.

10

8. The method of consistently selecting a particular PDSN of claim 6 wherein the indication of the IP address of the selected PDSN is a PDSN zone ID.

9. A Packet Core Function (PCF) that consistently selects a particular
15 Packet Data Service Node (PDSN) from a plurality of PDSNs in a packet data network to host a data session for a Mobile Node (MN), said PCF comprising:

a static lookup table that includes a list of identifiers for MNs and an associated list of the plurality of PDSNs in the network;

means for obtaining an identifier for the MN; and

20 a hash function that associates the identifier for the MN with the particular PDSN utilizing the lookup table, and selects the particular PDSN to host the data session for the MN.

10. The PCF of claim 9 further comprising:
25 a cache memory that stores the identifier for the MN and an Internet Protocol (IP) address for the particular PDSN for a predetermined period of time after handing off the MN to another PCF;

a cache timer for determining when the predetermined time period has expired; and

30 means for reselecting the particular PDSN to host the data session if the MN returns to the PCF within the predetermined period of time.

-17-

11. A system for consistently selecting a particular Packet Data Service Node (PDSN) from a plurality of PDSNs in a packet data network to host a data session for a Mobile Node (MN), said system comprising:

5 a Radio-Packet (R-P) network that connects each of a plurality of Packet Core Functions (PCFs) to the plurality of PDSNs; and

a plurality of PCFs, each PCF selecting a PDSN to host the data session when the MN roams into an area controlled by the PCF, each of said PCFs comprising:

a static lookup table that includes a list of identifiers for MNs and an associated list of the plurality of PDSNs in the network;

10 means for obtaining an identifier for the MN; and

a hash function that associates the identifier for the MN with the particular PDSN utilizing the lookup table, and selects the particular PDSN to host the data session for the MN.

15

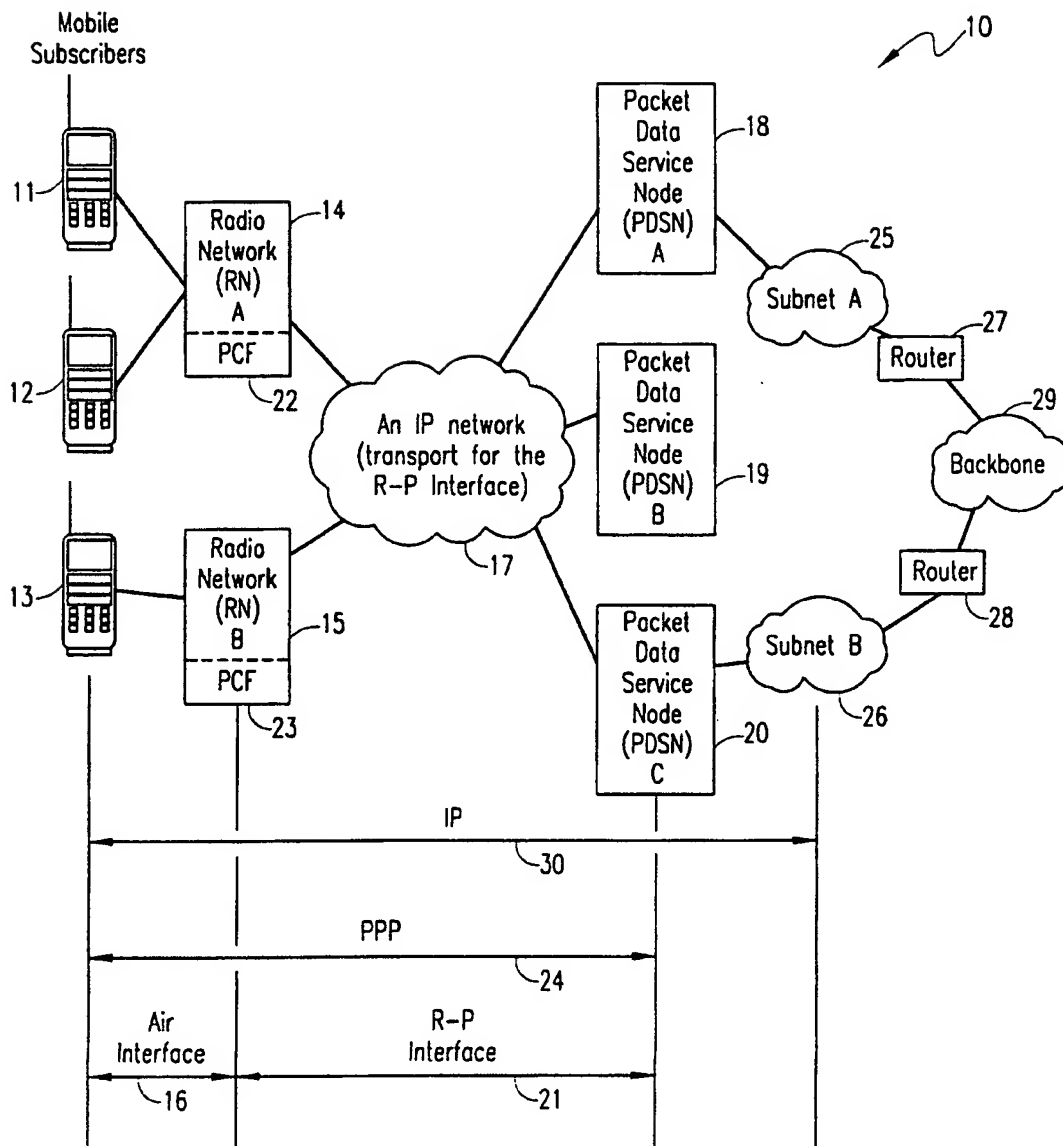


FIG. 1
(PRIOR ART)

2/5

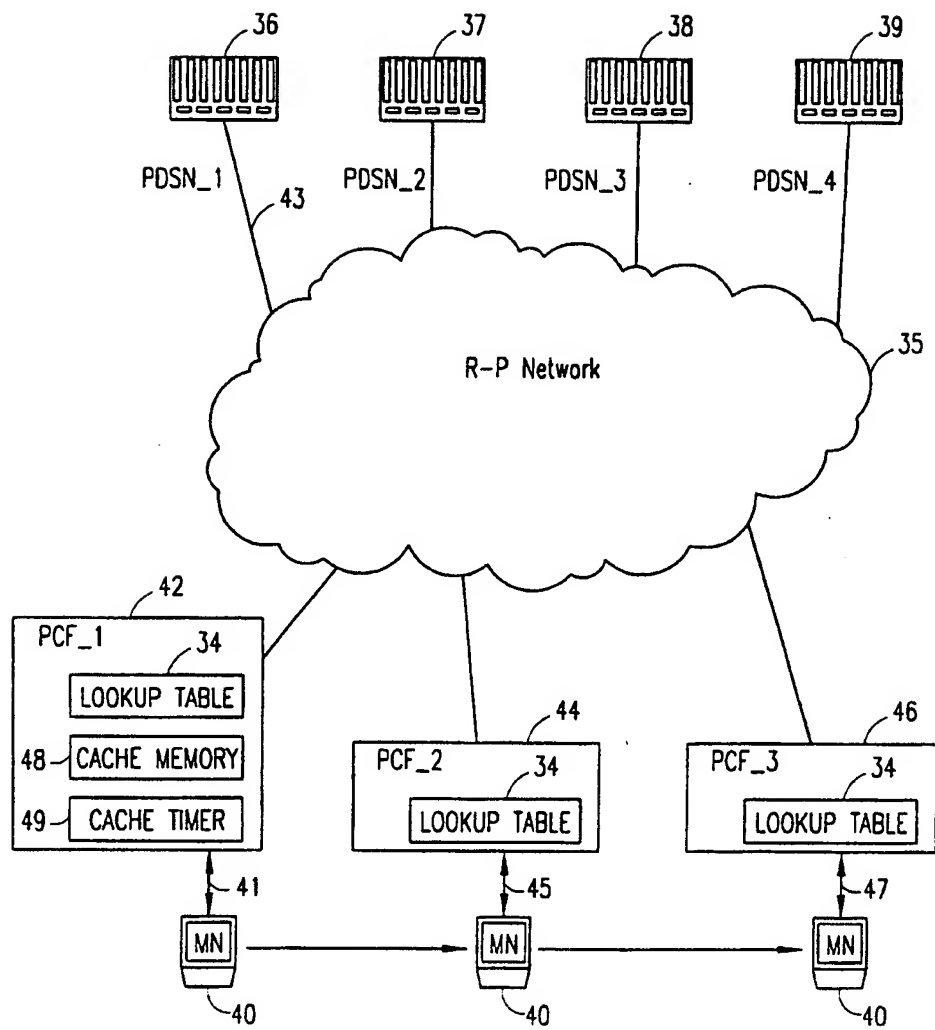


FIG. 2

3/5

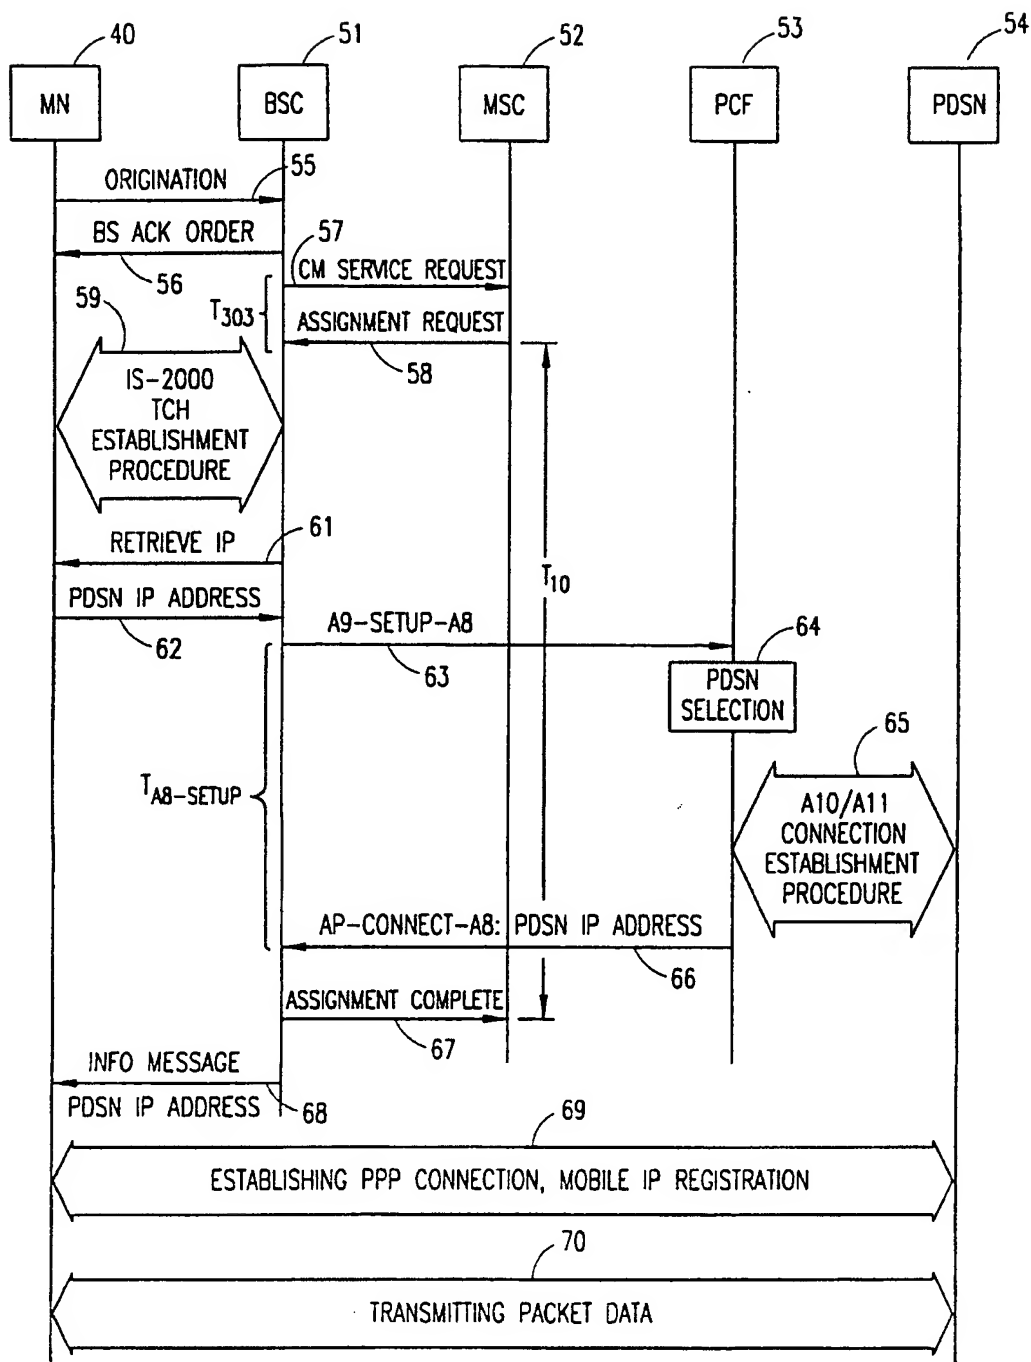
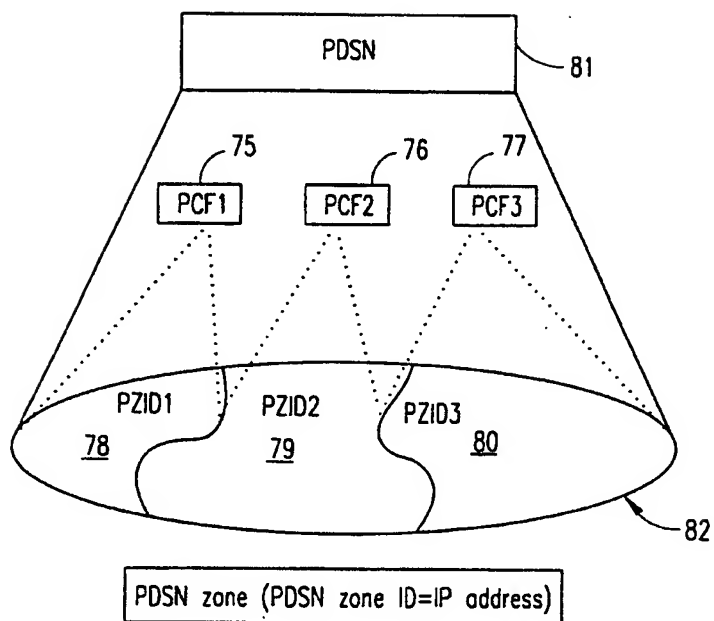


FIG. 3

*FIG. 4*

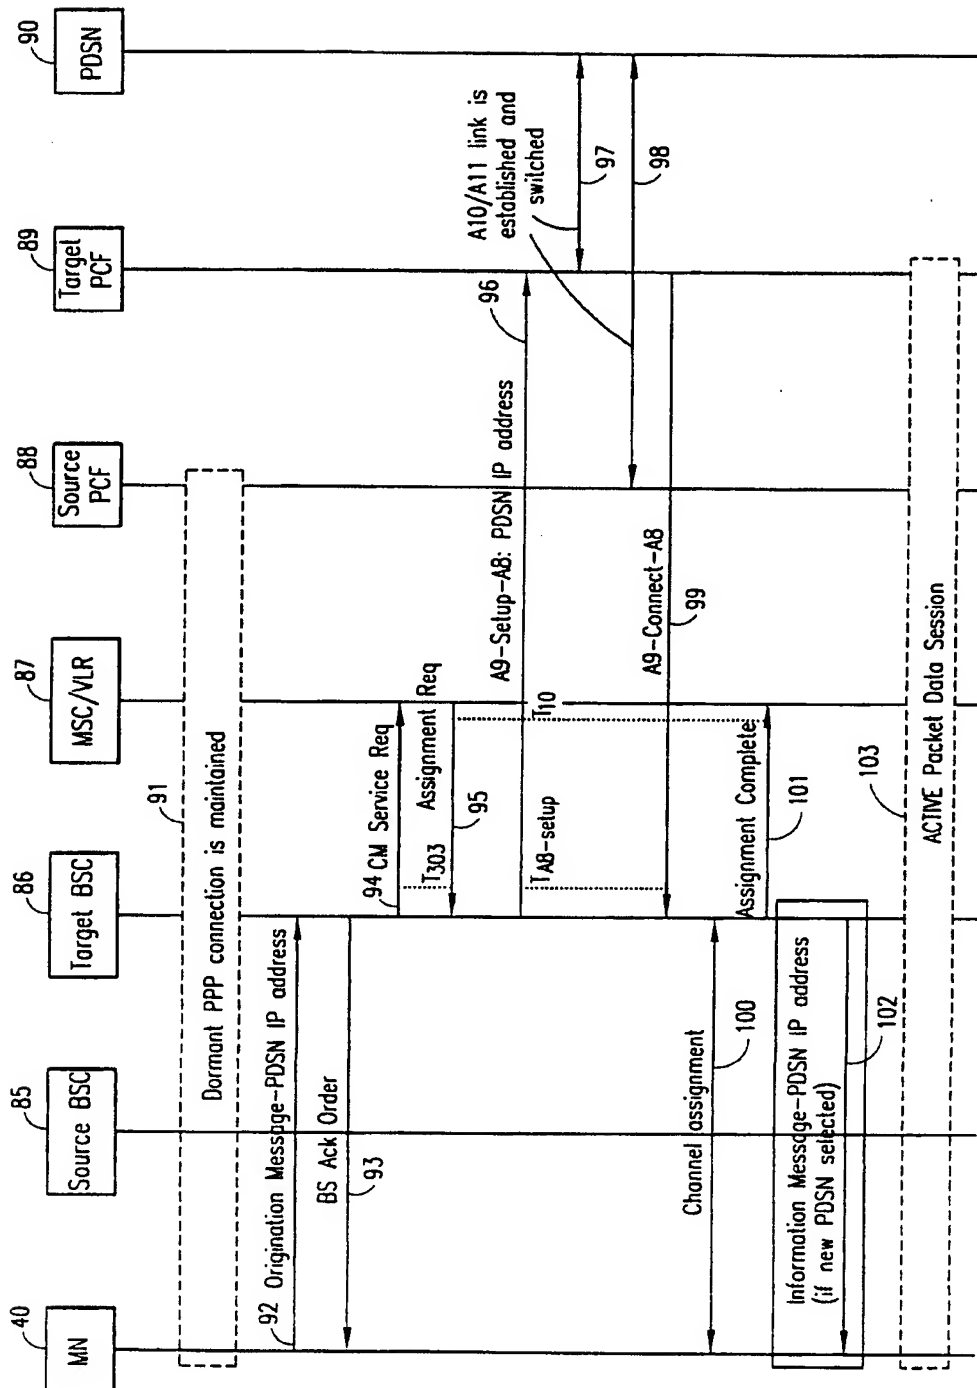


FIG. 5

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
13 September 2001 (13.09.2001)

PCT

(10) International Publication Number
WO 01/67786 A3

(51) International Patent Classification⁷: **H04Q 7/22**

28 Buttonwood, Dollard-des-Ormeaux, Quebec H9A 2N2 (CA).

(21) International Application Number: PCT/SE01/00455

(22) International Filing Date: 2 March 2001 (02.03.2001)

(25) Filing Language: English

(26) Publication Language: English

(30) Priority Data:
60/188,529 10 March 2000 (10.03.2000) US
09/658,432 8 September 2000 (08.09.2000) US

(74) Agents: MAGNUSSON, Monica et al.; Ericsson Radio Systems AB, Patent Unit Radio Access, S-164 80 Stockholm (SE).

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CR, CU, CZ, DE, DK, DM, DZ, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, TZ, UA, UG, UZ, VN, YU, ZA, ZW.


(71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE).

(84) Designated States (regional): ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZW). Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM). European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE, TR). OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG).

(72) Inventors: MADOUR, Lila; 34 Rue Beauvois, Kirkland, Quebec H9J 3W2 (CA). SEGURA, Louis; 1800 Guertin, St. Laurent, Quebec H4L 4C8 (CA). SHAFIK, Karim;

[Continued on next page]

(54) Title: PACKET CORE FUNCTION AND METHOD OF SELECTING A PACKET DATA SERVICE NODE/FOREIGN AGENT IN A PACKET DATA NETWORK

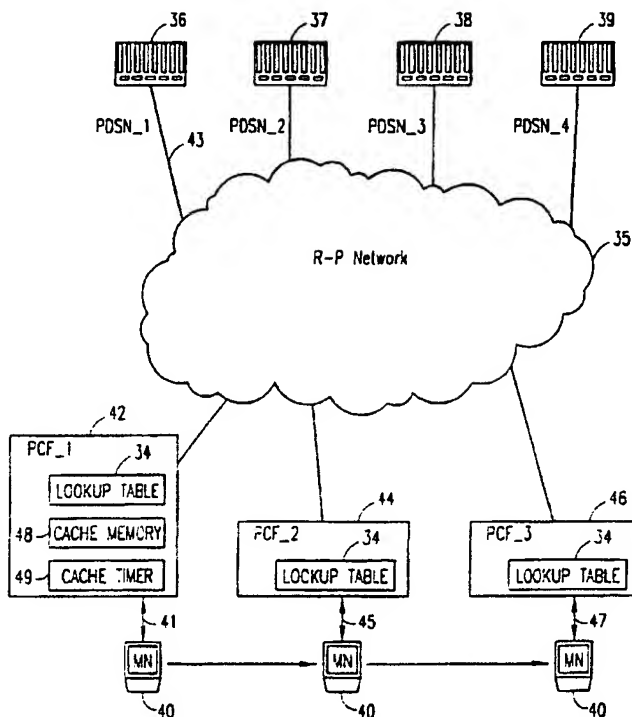

(57) Abstract: A packet Core Function (PCF(53, 75, 88, 89)) and method of consistently selecting a Packet Data Service Node (PDSN(54, 81, 90)) from a plurality of PDSNs in a packet data network to host a data session for a Mobile Node (MN(40)). In a first embodiment, a static lookup table (34) in the PCF (42, 44, 46) is used to associate a list of identifiers for MNs and a list of the plurality of PDSNs in the network. The PCF obtains an identifier for the MN and utilizes the lookup table and a hash function to associate the identifier for the MN with a PDSN. The PDSN is then selected by the PCF to host the data session for the MN. In another embodiment, the PCF also includes a cache timer (49) and a cache memory that stores the identifier for the MN and the IP address of the selected PDSN for a predetermined time period following the handoff of the MN to another PCF. If the MN returns to the PCF within the predetermined period of time, the PCF reselects the same PDSN to host the data session. In another embodiment, following the initial selection of a PDSN to host the data session, the IP address of the PDSN is sent to the MN which then passes the IP address of the PDSN to any subsequent PCFs where the MN roams. A PDSN zone ID may be utilized in lieu of the full IP address.

WO 01/67786 A3

WO 01/67786 A3



Published:

— with international search report

(88) Date of publication of the international search report:

28 February 2002

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 01/00455

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
P,A	WO 0024209 A1 (NOKIA NETWORKS OY), 27 April 2000 (27.04.00), page 6, line 25 - page 7, line 14, abstract	1-11
	--	
P,A	WO 0021254 A2 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 13 April 2000 (13.04.00), abstract	1-11
	--	
A	US 5711008 A (MARTIN LOUIS JOSEPH GALLANT ET AL), 20 January 1998 (20.01.98), column 2, line 59 - column 4, line 20	1-11
	--	

☒ Further documents are listed in the continuation of Box C.

☒ See patent family annex.

- * Special categories of cited documents:
- "A" document defining the general state of the art which is not considered to be of particular relevance
 - "E" earlier application or patent but published on or after the international filing date
 - "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
 - "O" document referring to an oral disclosure, use, exhibition or other means
 - "P" document published prior to the international filing date but later than the priority date claimed
 - "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
 - "X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
 - "Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art
 - "&" document member of the same patent family

Date of the actual completion of the international search

1 November 2001

Date of mailing of the international search report

26. 11. 2001

Name and mailing address of the International Searching Authority
 European Patent Office P.B. 5818 Patentlaan 2
 NL-2280 HV Rijswijk
 Tel (+31-70) 340-2040, Tx 31 651 epo nl,
 Fax (+31-70) 340-3016

Authorized officer

Stefan Hansson/mj
 Telephone No.

INTERNATIONAL SEARCH REPORT

International application No.

PCT/SE 01/00455

C (Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5548586 A (EIJI KITO ET AL), 20 August 1996 (20.08.96), column 3, line 20 - column 4, line 47 -----	1-11

INTERNATIONAL SEARCH REPORT
Information on patent family members

International application No.
PCT/SE 01/00455

Patent document cited in search report			Publication date	Patent family member(s)		Publication date
WO	0024209	A1	27/04/00	AU	6343899 A	08/05/00
				FI	982258 A	20/04/00
WO	0021254	A2	13/04/00	AU	1301600 A	26/04/00
				EP	1119986 A	01/08/01
US	5711008	A	20/01/98	CA	2208961 A	06/09/96
				DE	69518169 D,T	14/12/00
				EP	0812517 A,B	17/12/97
				JP	2884019 B	19/04/99
				JP	10510409 T	06/10/98
				WO	9627268 A	06/09/96
US	5548586	A	20/08/96	GB	2292290 A,B	14/02/96
				GB	9516639 D	00/00/00
				JP	8056378 A	27/02/96